

# Light weight spray guns, “Baby” series

Compact with less water usage




**Reference:**

**BABTN01-B** Aluminium  
**BMBTN01-B** Brass  
**BRBTN01-B** Stainless Steel

All **bold** printed items are ex. Stock available



Clear red arrow to show the water beam direction

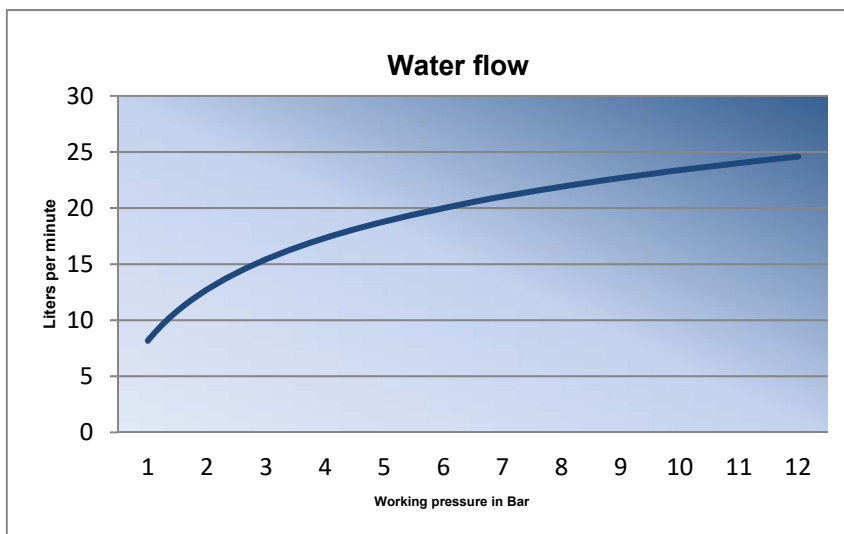

Water flow in l/min with fully squeezed trigger



Water beam controllable from broad beam to strong jet

Technical specifications	<b>BABTN01-B</b>	<b>BMBTN01-B</b>	<b>BRBTN01-B</b>
Body	Aluminium	Brass	St.st. AISI 316
Covers	EPDM	EPDM	EPDM
Seals	EPDM (FDA)	EPDM (FDA)	VITON (FDA)
Trigger and pusher	St.st. AISI 304	St.st. AISI 304	St.st. AISI 304
Connection	½" BSP female	½" BSP female	½" BSP female
Max. temperature	50 °C (122 °F)	95 °C (231 °F)	95 °C (231 °F)
Max. pressure	12 bar (170 PSI)	25 bar (354 PSI)	25 bar (354 PSI)
Weight	360 g	622 g	680 g

**Not for use with steam**

\*\*\* Although all products are suited for use with higher temperatures, it's strongly recommended to take special precautions when using hot water.

