
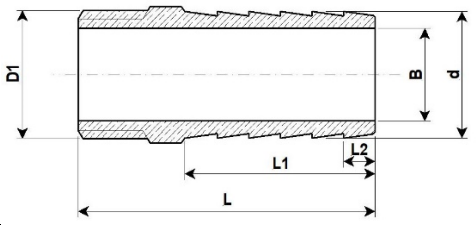

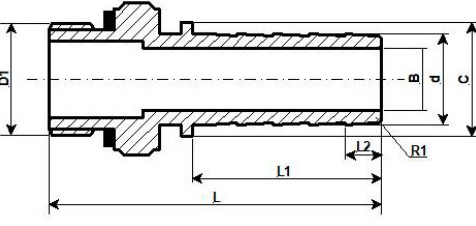





Schlauchstutzen

Material : Messing							
							
Referenz	d(mm)	D1(BSP)	B(mm)	L(mm)	L1(mm)	L2(mm)	
MESS013	14,0	1/2"	10,0	48,0	30,0	5,0	
MESS019	20,4	1/2"	15,0	48,0	30,0	5,0	
MESS019-3/4T	20,4	3/4" (BSPT)	15,0	61,0	38,0	5,4	
MESS025	25,0	1/2"	19,8	58,0	37,0	3,0	
Material : AISI 316							
Dichtung : VITON							
							
Referenz	d(mm)	D1(BSP)	B(mm)	C(mm)	L(mm)	L1(mm)	L2(mm)
RVST013-C17	13,6	1/2"	9,0	17,0	58,5	31,0	6,7
RVST013-C17-SP *	13,6	1/2"	9,0	17,0	58,5	31,0	6,7
RVST013-C20	13,6	1/2"	9,0	20,0	58,5	31,0	6,7
RVST013-C20-SP *	13,6	1/2"	9,0	20,0	58,5	31,0	6,7
RVST016-C21	16,8	1/2"	11,5	21,0	62,2	35,0	6,8
RVST016-C21-SP *	16,8	1/2"	11,5	21,0	62,2	35,0	6,8
RVST019-C24	19,8	1/2"	14,0	24,0	66,3	39,0	6,8
RVST019-C24-SP *	19,8	1/2"	14,0	24,0	66,3	39,0	6,8
RVST025	25,1	1/2"	14,0	-	58,3	38,0	3,0
* Schlauchstutz mit flexiblen Antiknickfeder							
							
							
Schlauch mit normalen Stutz				Schlauch mit Stutz und flexiblen Schutzfeder			

