

# Stainless steel (316) heavy duty spray guns

With rubber-insulated trigger

Version with insulated stainless steel trigger guard




**AKRN001-B blue**  
**AKRN001-W white**  
**AKRB001-BL black (big flow)**

**AKRNP01-B blue**  
**AKRNP01-W white**  
**AKRNP01-B-U\* blue**  
**AKRNP01-W-U\* white**

**AKRNP01-B-SWR09-1/2**  
**AKRNP01-W-SWR09-1/2**  
 With st.st swivel 1/2" BSP female.

All **bold** printed items are stock items

\*NPT female thread

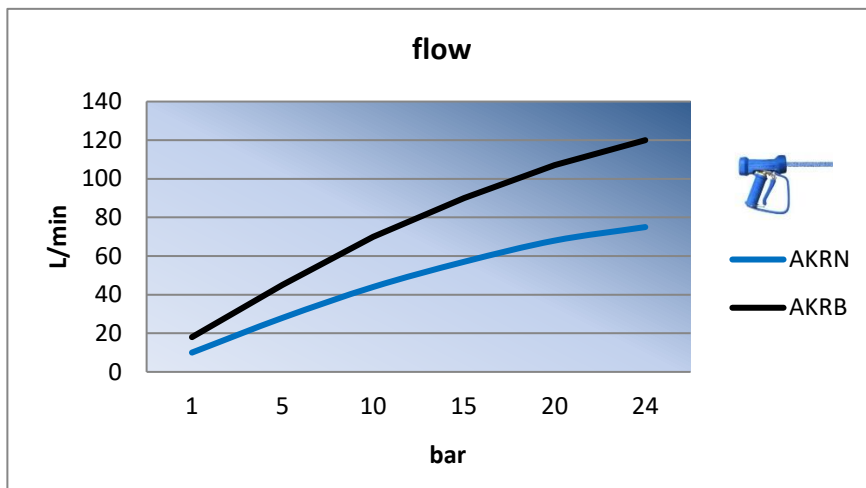

Water flow in l/min when operating lever is fully retracted, depending on pressure



## Technical data

- Rugged Stainless Steel (316) housing
- EPDM Covers
- Seals from VITON suited for food (FDA)
- Trigger handle and pusher in Stainless Steel
- 1/2" BSP female inlet / \*NPT
- Max. temp. 95 °C (200 °F)
- Max. pressure 24 bar (350 psi)
- Weight about 813 / 983 gram
- Water jet controllable from wide to straight
- Clear red arrow to show the water jet direction

Rubber collar for better protection



\*\*\* Although all materials can handle temperatures above 100 °C, special precautions are recommended if hot water is used.

**Not for steam!**

The use of a ball-bearing swivel fitting on a gun will have a positive effect on operator comfort and hose life. See page "Ball-bearing swivels".

Also available:

Spray gun in brass, brass chrome-plated, stainless steel (AISI 316) and lightweight plastic PA66.

Special spray guns for: hot water, high water flow, (foam) lance mounting, sterilisable, ATEX and Spray guns with an "NPT" - thread (USA) connection.

