

# Stainless steel spray guns with back trigger

With unlosable rubber hand grip and insulated trigger handle in stainless steel




## Technical data

- Rugged stainless steel (316) housing
- Covers from EPDM
- Seals from VITON suited for food (FDA)
- Trigger handle and pusher in Stainless steel
- 1/2" NPT female inlet
- Max. temp. 95 °C (200 °F)
- Max. pressure 24 bar (350 psi)
- Weight about 870 grams
- Water beam controllable from broad beam to strong jet

**AKRBT01-B**

**AKRBTB1-B-U (big flow)**

All types in **bold** are available from stock

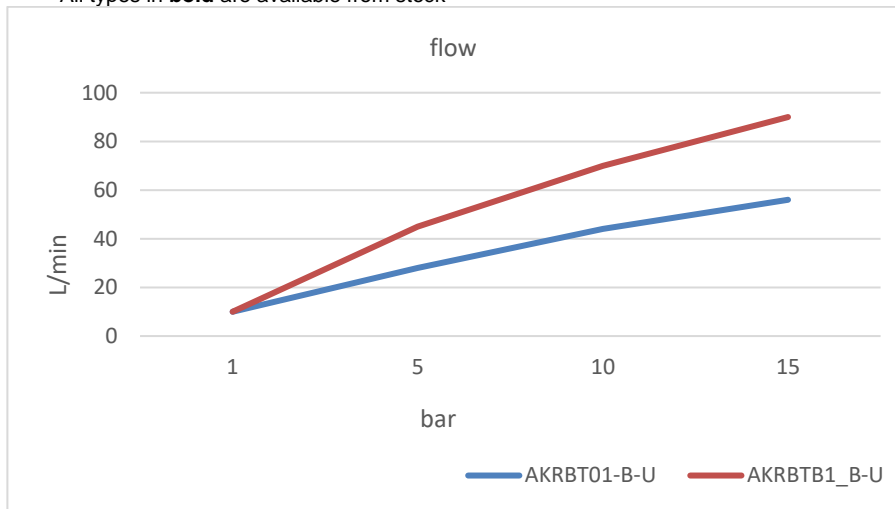

Water flow in l/min when operating lever is fully retracted, depending on pressure




\*\*\* Although all materials can handle temperatures above 100 °C, special precautions are recommended if hot water is used.

**Not for steam!**

Using a ball-bearing swivel on a gun will have a positive effect on operator comfort and hose lifespan. See page "Ball-bearing swivels."

Clear red arrow for beam direction



Also available:

Spray gun in brass, chrome-plated brass, stainless steel (AISI 316) and lightweight plastic PA66.

Special spray guns for: hot water, high water flow, (foam) lance assembly, sterilisable, ATEX and Spray guns with an "NPT" - thread (USA) connection.

