

AKBO ball bearing swivels



AKBO ball-bearing swivels are available in brass, chrome-plated brass and stainless steel (AISI 316).

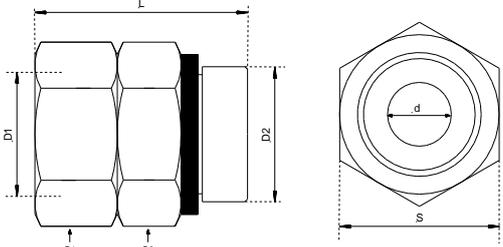
Using a ball-bearing swivel fitting on a hose with a water gun will have a positive effect on operator comfort and hose lifespan.

The brass swivel fittings use EPDM (FDA) seals, while the stainless steel versions have VITON (FDA) seals.

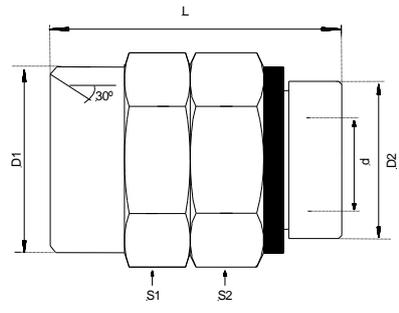
The swivel fittings can be used up to an operating pressure of 30 bar and up to a temperature of 95 °C.

Other sizes are available on request.

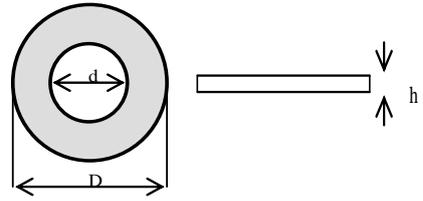
Male / Female

								
			Dimensions L, d, S1, and S2 in mm					
Brass	Chrome plated	Stainless steel	L	d	D1	D2	S1	S2
SWM09-1/2	SWC09-1/2	SWR09-1/2	40	9	1/2"	1/2"	27	27
SWM09-3/4	SWC09-3/4	SWR09-3/4	40	9	3/4"	1/2"	30	27
SWM14-3/4		SWR14-3/4	59	14	3/4"	1/2"	30	27
SWM12-3/4x3/4		SWR12-3/4x3/4	40	12	3/4"	3/4"	30	30
SWM18-1x1		SWR18-1x1	49	18	1"	1"	36	36

Male / Male

								
On request								
Brass	Chrome plated	Stainless steel	L	d	D1	D2	S1	S2
SWM09-1/2Mx1/2M		SWR09-1/2Mx1/2M	46	9	1/2"	1/2"	27	27
SWM09-1/2Mx3/4M		SWR09-1/2Mx3/4M	48	9	3/4"	1/2"	27	27

Flat seals

EPDM (FDA)	VITON (FDA)	Dimensions in mm			
Male side	Male side	d	D	h	
SWSEM 1/2	SWSVM 1/2	17	26	2	
SWSEM 3/4	SWSVM3/4	23,5	32	2	
Female side	Female side				
SWSEF 1/2	SWSVF 1/2	11	23	2	
SWSEF 3/4	SWSVF 3/4	15	27	2	

All bold printed items are ex. Stock available. Other dimensions on request.

