

Brass heavy duty spray guns

With insulated trigger

Available in different colours



AKMN001-B blue **AKMN001-G** green
AKMN001-R red **AKMN001-W** white
AKMN001-Y yellow **AKMN001-BL** black

With insulated trigger guard



AKMNP01-B




AKMNP01-B-SW12

With ball bearing brass swivel 1/2" BSP female

AKMNP01-B-SW34

With ball bearing brass swivel 3/4" BSP female

All **bold** printed items are ex. stock available

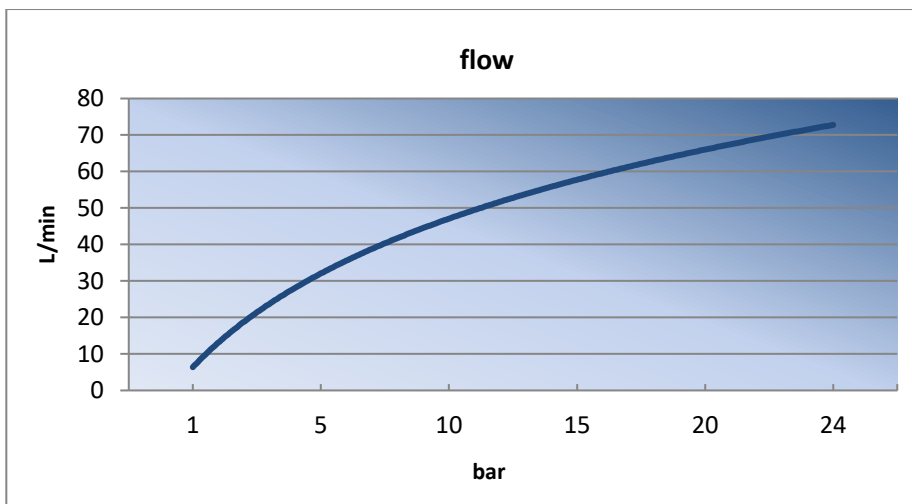

Water flow in l/min when operating lever is fully squeezed, depending on pressure



Adjustable spray pattern, from wide angle to strong jet

Technical data

- Brass housing
- Covers from EPDM rubber
- Seals from EPDM (FDA)
- Trigger handle and pusher from AISI 304
- 1/2" BSP female inlet
- Max. temperature: 95 °C (200 °F)
- Max. pressure: 24 bar (350 psi)
- Weight in grams: AKMN001 = 835; AKMNP01-B = 1031; AKMNP01-B-SW12 = 1084; AKMNP01-B-SW34 = 1114



Red arrow for flow direction

*** Although all materials can handle temperatures above 100 °C, special precautions are recommended if hot water is used.

Not for steam!

The use of a ball-bearing swivel on a pistol will have a positive effect on operator comfort and hose lifespan. See page "Ball-bearing swivel fittings".

Also available:

Spray gun in brass, chrome-plated brass, stainless steel (AISI 316) and lightweight plastic PA66.

Special spray guns for: hot water, high water yield, (foam) lance assembly, sterilisable, ATEX and Spray guns with an "NPT" - thread (USA) connection.

