


Brass heavy-duty spray guns in different colours



All bold printed items are ex. Stock available

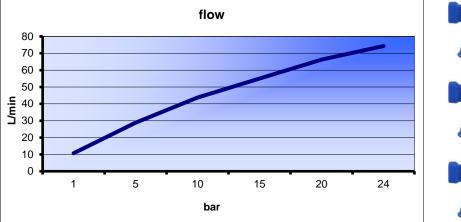

Water flow in I/min when operating lever is fully retracted, depending on pressure

Technical data

- Strong brass housing
- Cover from EPDM rubber
- Seals from EPDM (FDA) .
- Trigger handle and pusher in St. St. .
- 1/2" BSP female connection
- Max. temp. 95 °C (200 °F)
- Max. pressure 24 bar (350 psi)
- Weight about 810 grams
- Controllable beam pattern from broad spray to strong jet

*** Although all materials can handle temperatures above 100 °C, special precautions are recommended if hot water is used. Not for steam!

The use of a ball-bearing swivel fitting on a gun will have a positive effect on operator comfort and hose life. See page "Ball-bearing swivels".

Also available:

Spray guns in brass, brass chromed, stainless steel (AISI 316) and lightweight plastic PA66.

Special spray guns for: hot water, high water yield, (foam) lance mounting, sterilisable, ATEX and Spray guns with an "NPT" - thread (USA) connection.



Adjustable spray pattern

Arrow for Beam direction

