

# Spray guns with big flow

With unlosable rubber handgrip and insulated trigger handle in St. St.  
 With insulated trigger protection in St. St.



**AKMB001-BL**  
**AKRB001-BL (St. St. 316)**




**AKMBP01-BL**



**AKMBP01-BL-SWM14-3/4**  
 With ball bearing swivel in brass with 3/4"female and full bore

All **bold** printed items are ex. Stock available

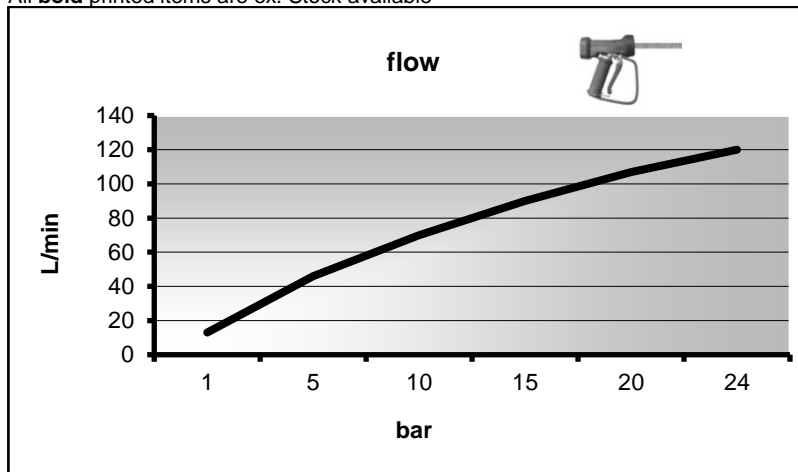

Water flow in l/min when operating lever is fully retracted, depending on pressure



## Technische data

- Rugged brass or stainless steel (AISI 316) housing
- Covers from EPDM rubber
- Seals AKMB=EPDM (FDA)
- Seals AKRB=VITON suited for food (FDA)
- Trigger handle and pusher in Stainless Steel
- 1/2" BSP female inlet
- Max. temp. 95 °C (200 °F)
- Max. pressure 24 bar (350 psi)
- Weight about 870 grams
- Water beam controllable from broad beam to strong yet
- Clear red arrow to show the water beam direction

\*\*\* Although all materials can handle temperatures above 100 °C, special precautions are recommended if hot water is used.

**Not for steam!**

The use of a ball-bearing swivel fitting on a gun will have a positive effect on operator comfort and hose life. See page "Ball-bearing swivels".

Also available:

Spray gun in brass, brass chrome-plated, stainless steel (AISI 316) and lightweight plastic PA66.

Special spray guns for: hot water, high water yield, (foam) lance assembly, sterilisable, ATEX and Spray guns with an "NPT" - thread (USA) connection.

