

Chrome plated brass heavy duty spray guns

With rubber-insulated trigger

Version with insulated trigger guard



AKCN001-B blue




AKCNP01-B blue
AKCNP01-W white
AKCNP01-W-U* white



AKCNP01-B-SWC09-1/2
AKCNP01-W-SWC09-1/2
With chrome plated swivel 1/2" BSP female.

All types in **bold** are available from stock. *NPT thread connection

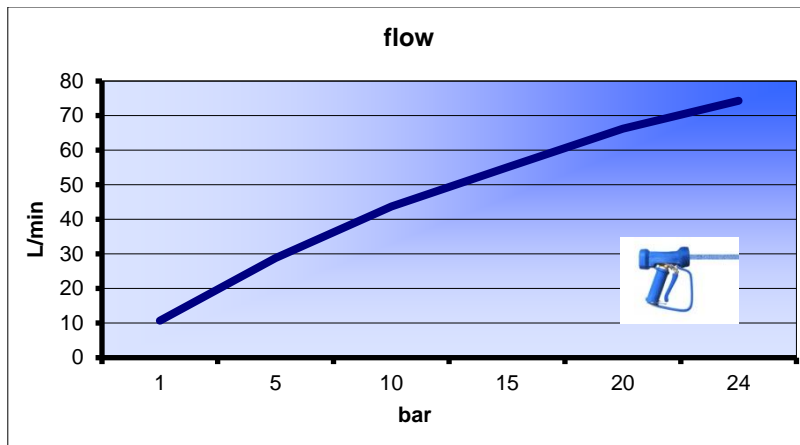

Water flow in l/min when operating lever is fully retracted, depending on pressure



Technical data

- Rugged chrome plated brass housing
- Covers from EPDM rubber
- Seals from EPDM (FDA)
- Trigger handle and pusher in Stainless Steel
- 1/2" BSP female inlet / *NPT
- Max. temp. 95 °C (200 °F)
- Max. pressure 24 bar (350 psi)
- Weight about 867 / 1016 gram
- Water jet controllable from wide to straight

Rubber collar for better protection



Red arrow for jet direction



*** Although all materials can handle temperatures above 100 °C, special precautions are recommended if hot water is used.

Not for steam!

The use of a ball-bearing swivel fitting on a gun will have a positive effect on operator comfort and hose life. See page "Ball-bearing swivels".

Also available:

Spray gun in brass, brass chrome-plated, stainless steel (AISI 316) and lightweight plastic PA66.

Special spray guns for: hot water, high water yield, (foam) lance assembly, sterilisable, ATEX and Spray guns with an "NPT" - thread (USA) connection.

