

Chrome-plated brass cleaning guns

With non-slip handle and rubber-insulated stainless steel trigger

This brass gun is coated with a protective layer of chrome. It is available in blue, in a white or blue version with trigger guard and also available with pre-mounted swivel coupling. And if you need a version with NPT female connection, you can contact us. For detailed technical information, please refer to the next page.

- Solid brass body, coated with chrome
- Strong rubber cover with good resistance to animal fats (including chicken fat)
- Insulated trigger for increased grip, comfort and protection against high temperatures
- Double internal seals for additional security
- Continuously adjustable spray pattern via trigger


A ball bearing swivel on a gun improves user friendliness and extends the life span of the hose. See the "Swivel Couplings" page for more information.



Variable jet

Although all materials can handle temperatures up to 95°C, special precautions are recommended if hot water is used.

The gun is not suitable for steam!

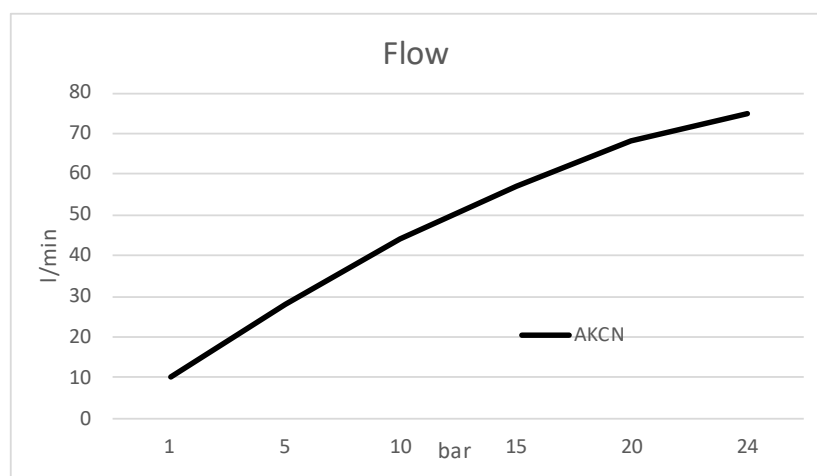

It is possible to order a cleaning gun with your own logo (from 200 pieces), see page "Personalisation".

Available models:



AKCN001-B (blue)



AKCNP01-B
blue with trigger guard

AKCNP01-W
white with trigger guard

AKCNP01-W-U
white with trigger guard and 1/2" NPT female



AKCNP01-B-SW12 (blue)
with swivel 1/2" BSP female

AKCNP01-W-SW12 (white)
with swivel 3/4" BSP female

All article numbers in **bold** are available from stock.

Features of the chrome-plated brass cleaning gun



- These features can also be found on cleaning guns from the
- **AKMN- series brass**
 - **AKRN- series stainless steel (AISI 316)**
 - **AKMB- series brass high flow rate**
 - **AKRB- series stainless steel (AISI 316) high flow rate**

Technical data

	AKCN001-B / AKCNP01-B/W/W-U*	AKCNP01-B/W-SW12
Body material	Brass HPb59-3 + Cr layer	Brass HPb59-3 + Cr layer
Trigger, pusher and trigger guard	St.st. X5CrNi18-10 (AISI 304)	St.st X5CrNi18-10 (AISI 304)
Nozzle shaft and spring	St. st X5CrNi17Mo-12-2 (AISI 316)	St.st X5CrNi17Mo-12-2 (AISI 316)
Rubber casing	EPDM	EPDM
Seals	EPDM (FDA)	EPDM (FDA)
Connection	1/2" BSP fem. thread / W-U* = 1/2" NPT fem. thread	1/2" BSP female thread
Maximum temperature	95 °C	95 °C
Maximum pressure	24 bar	24 bar
Waterflow at 5 bar	28 l/min	28 l/min
Weight	867 g / 1016 g	1110 g
Dimensions	145 x 56 x 165 mm / 195 x 56 x 165 mm	195 x 56 x 165 mm

It is possible to order a cleaning gun with your own logo (from 200 pieces).