

Stainless steel quick couplings and adapters


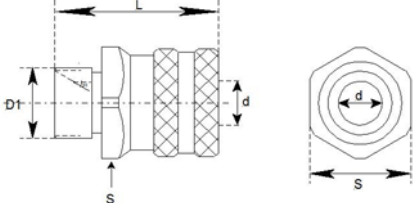

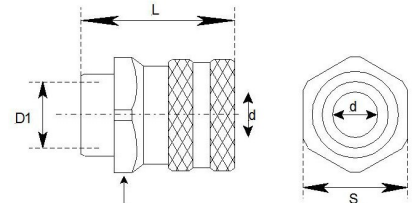

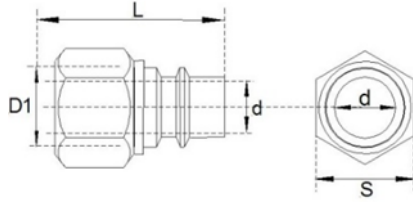

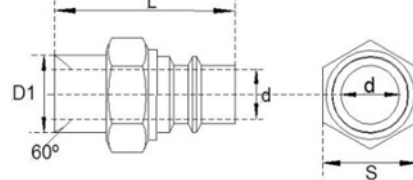
Snaptite compatible

These stainless steel couplings are compatible with the Snaptite type. The stainless steel couplings and adapters simplify the connection of spray guns to hoses, lances and any other parts.



Technical specifications

Housing and ring : RVS AISI 303
 Spring and circlip : RVS AISI 301
 Balls : RVS AISI 420
 Max. pressure : 200 bar
 Max. temperature : 100 °C
 Seal : VITON

Quick couplings						
		Quick coupling with 1/2" BSP male				
		Article no.	L (mm)	D (mm)	D1 (BSP)	S (mm)
		COUSB1/2-M	47,0	11,0	1/2"	30,0
		Quick coupler with 1/2" BSP female				
		Article no.	L (mm)	D (mm)	D1 (BSP)	S (mm)
		COUSB1/2-F	41,4	16,0	1/2"	30,0
Adapters						
		Adapter with 1/2" BSP female				
		Article no.	L (mm)	D (mm)	D1 (BSP)	S (mm)
		ADSNB1/2-F	37,5	11,8	1/2"	27,0
		Adapter with 1/2" BSP male				
		Article no.	L (mm)	D (mm)	D1 (BSP)	S (mm)
		ADSNB1/2-M	45,3	11,8	1/2"	22,0