

# Cleaning hose type SR

(Foodstuff quality, EU10/2011)

Suitable according to Reg. CE 1935/2004 and Reg. UE 10/2011 for contact with foodstuff that requires a simulating liquid type A B C, migration tests performed at 40°C for 24 hours.




Temperature:	-5°C up to +60°C				
Working pressure:	SR13: 80 bar at 23°C; 48 bar at 60°C SR19: 60 bar at 23°C; 35 bar at 60°C				
Inner tube:	foodstuff quality smooth and flexible PVC (white)				
Reinforcement:	double polyester yarn				
Outer tube:	food grade smooth and flexible PVC (blue/white)				
Chemical resistance:	according to PVC table				
Article code	Inner Ø (mm)	Outer Ø (mm)	Weight (g/m)	Bending radius (mm)	Available lengths (m)
SR13-(m)*-00	13,0	23,0	350	45	up to 100
SR19-(m)*-00	19,0	28,0	460	100	up to 50
*Instead of 'm' please fill out the length in meters, example: "SR13-20-00" for 20m hose.					

It's also possible to order complete assembled hoses. Please find below an example.

In this example we mount 20 meter hose with:  
Side 1: Swivelling ½" BSPT male thread and hose protection  
Side 2: ½" BSP female screw cap with flat seal



The article number will be as follows:

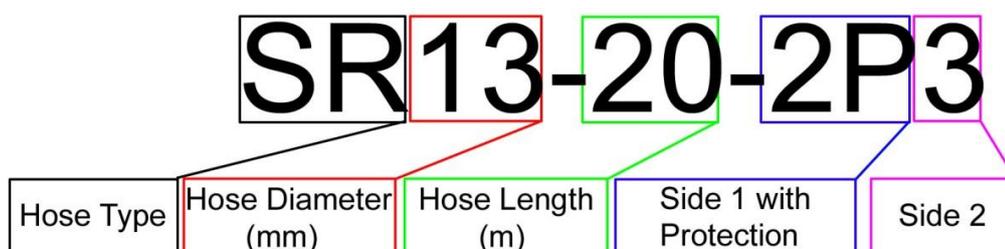

The corresponding numbers for the different hose connections we can mount can be found on the next page.

**Please let us know what size thread you require on your fitting. For example, ½", ¾" or 1". Also for quick release fittings and adapters.**

