

Water saving spray head

The low flow spray head is a professional cleaning gun, which is ideal for longer cleaning jobs with a powerful jet and an economical use of water. With the rotatable head you can accurately set the spray angle and then spray for a long time without effort.



Article numbers:


Brass versions : **AKMSHHL1-BL** (head) or **AKMSHL1-B** (head with blue grip GRIPML1-B)
 Stainless steel versions : **AKRSHHL1-BL** (head) or **AKRSHL1-B** (head with blue grip GRIPRL1-B)

Technical data

	AKMSHL1-B	AKRSHL1-B
Weight	550 gram	525 gram
Dimensions (L x D)	195 x 50 mm	195 x 50 mm
Materials of head	Brass (H59-3) and POM	Stainless steel (AISI 304) and POM
Materials of grip	Brass (H59-3) and EPDM	Stainless steel (AISI 304) and EPDM
Material of screw	Stainless steel (AISI 304)	Stainless steel (AISI 304)
Maximum pressure	16 bar	16 bar
Maximum temperature	80 °C	80 °C
Connection head	½" BSPP male	½" BSPP male
Connection grip	½" BSPP female	½" BSPP female



Water flow in L/min at fully opened nozzle, depending on pressure

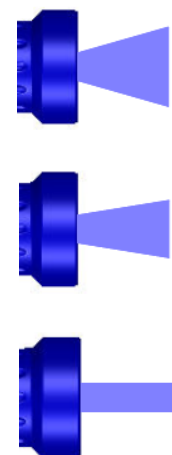

Adjustable spray pattern

Applications

Cleaning of machines, animals and floors, e.g. in agriculture, riding stables, food industry, etc.

Also available:

Spray gun in brass, brass chromed, stainless steel (AISI 316) and lightweight plastic PA66.

Special spray guns for: hot water, high water flow, (foam) lance mounting, sterilisable, ATEX and Spray guns with an "NPT" - thread (USA) connection.

